



IMD-A190

19" INDUSTRIAL MONITOR

- ✓ 19" Color Active TFT Flat Panel Display
- ✓ 1280 x 1024 (native mode), 250 cd/m²
- ✓ Front Panel NEMA 4/IP 65 rated
- ✓ Steel chassis & front panel
- ✓ OSD controls on back side
- ✓ Auto phase / Auto position
- ✓ Optional resistive touch screen



DESCRIPTION

The IMD-A190(T) industrial monitor with 19" TFT LCD (250 cd/m) is a perfect fit for monitoring and control applications.

The 'T' version additionally offers a resistive touch screen.

The OSD buttons are situated on the back so the settings can't be changed accidentally.

The front panel of the display monitor is sealed with a gasket for NEMA 4/IP 65 rating when it is mounted in a NEMA rated cabinet or enclosure.

FEATURES

- ✓ 19" Color Active TFT Flat Panel Display
- ✓ Optional resistive touch screen
- ✓ Black painted steel front panel* with NEMA 4/IP 65 rating
- ✓ VGA input (optional DVI, Composite Video or S-Video input)
- ✓ Auto phase / Auto position
- ✓ OSD controls on back side
- ✓ 90~240 VAC power input (optionally 12/24 VDC power input)
- ✓ LCD Display: 19" SXGA 1280 x 1024 (native mode)
16.2M Colors, 250 cd/m² Luminance
Viewing angle : 140° (H) / 140° (V)
Backlight life: 50,000 hours


* Other colors or stainless steel available on request



IMD-A190

19" INDUSTRIAL MONITOR

Dimensions:

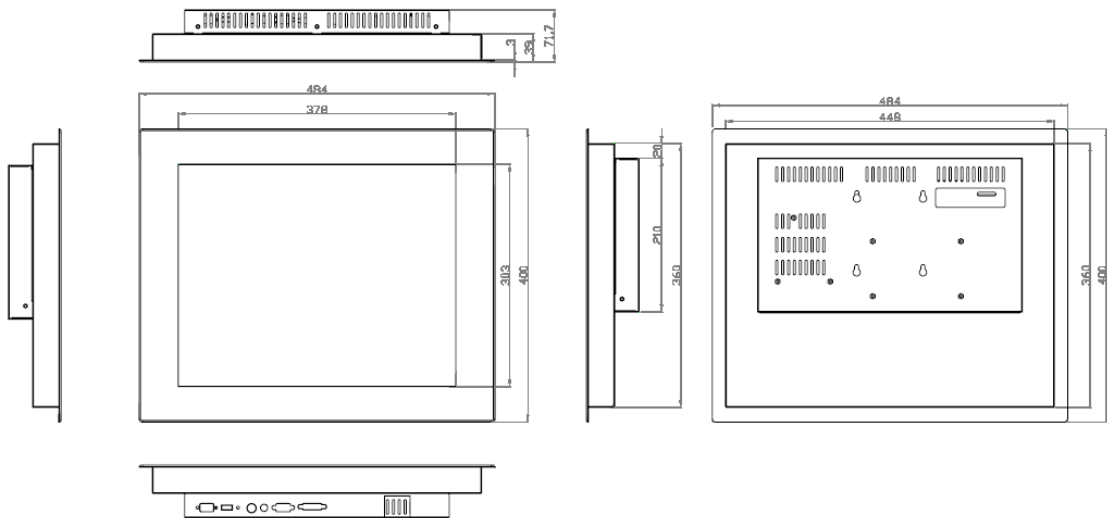

Display Specifications

Display:	19" Color Active TFT Flat Panel Display
Luminance:	250 cd/m ²
Resolution:	1280 x 1024 (native mode), 16.2M colors
Viewing Angle:	140° (H) / 140° (V)
Backlight Life:	CCFL 2 tubes, 50,000 hrs
OSD Controls/Indicators:	Automatic Screen, Setup (OSD), Brightness, Contrast, Horizontal/Vertical Position, Image Lock, Color Balance, Video Information, Power On and Sync
Touch Screen:	Resistive (optional)
Ports:	VGA input (optional DVI, Composite Video or S-Video input)
Power Supply:	90~240 VAC (optionally 12/24 VDC power input)

Mechanical Specifications

Construction:	Heavy-duty steel chassis, IP-65 certified steel front panel
Color:	Black (other colors or stainless steel available on request)
Dimensions:	484 mm (W) x 71.7 mm (D) x 400 mm (H)

Environmental Specifications

Operating Temperature:	0~50°C
Storage Temperature:	-20°C~60°C
Relative Humidity:	10~90% @ 40°C Non-condensing
Vibration:	1G peak, 5~500 Hz (Random)
Shock:	15G peak acceleration (11 msec. duration)
Certification:	CE, FCC Class A