



IMP-A193T

19" FANLESS PANEL PC

- ✓ Front Panel NEMA 4/IP 65 rating (Panel mount)
- ✓ Intel® Celeron M 1.5GHz
- ✓ Resistive Touch Screen
- ✓ 2 PCI expansion slots
- ✓ 12/24 VDC wide-ranging input



DESCRIPTION

The IMP-A193T is a compact, industrial Panel PC with 19" SXGA TFT LCD (300 cd/m²). It is powered by an Intel® Celeron M 1.5GHz processor. It supports 4 USB 2.0 ports, 2 COM ports, and 1 LAN port. The IMP-A193T operates on 10.8 ~ 28VDC power. This unit with touch screen is ideal for use as a PC-based controller for automotive applications, logistic processes, material handling, and also suitable for applications in the food, chemicals and medical industry.

FEATURES

- ✓ Completely fanless
- ✓ Black painted steel front panel* with NEMA 4/IP 65 rating
- ✓ Intel® Celeron Mobile 1.5 GHz processor, 512 MB RAM
- ✓ Low-power consumption
- ✓ Resistive Touch Screen
- ✓ Ethernet 10/100MB, 4 x USB 2.0 ports, 2 x serial
- ✓ 2 PCI expansion slots
- ✓ 40 GB rugged Hard Disk
- ✓ Slim CD-ROM Drive (optional CD/DVD/Combo Drive or CD-RW/DVD)
- ✓ 10.8 ~ 28 VDC wide-ranging input
- ✓ LCD Display: 19" SXGA 1280 x 1024
16.2MColors, 300 cd/m² Luminance
Viewing angle : 170° (H), 135° (V)


* Other colors or stainless steel available on request



IMP-A193T

19" FANLESS PANEL PC

Dimensions:

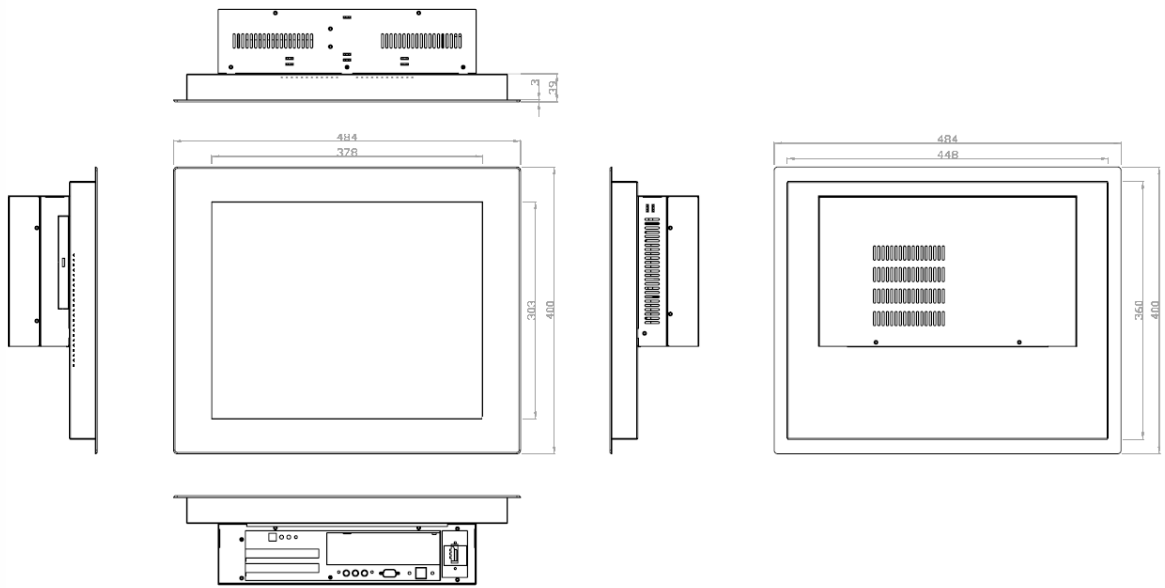

System Specifications

CPU Type/Speed: Intel® Celeron M; ULV 1.5GHz
 Chipset: Intel® 855GME
 Memory: 512MB 200-pin SO-DIMM, Max 1 GB
 BIOS: Phoenix-Award 2MB PnP BIOS
 IDE Interface: UDMA 33/66/100x2
 CD-ROM: Slim CD-ROM Drive (optional CD/DVD/Combo Drive or CD-RW/DVD)
 Hard Drive: 2.5" Slim type 40 GB rugged hard disk
 I/O ports: 1 x RS232 COM port, 1 x RS323/422/485 COM port,
 1 x Parallel, 2 x PS/2 (keyboard and mouse), 4 x USB 2.0, VGA
 1 x Ethernet Realtek RTL8100 (10/100Mbps) supports Wake-On-LAN
 VGA: Built-in Intel® 855GM
 Expansion Slots : 2 x PCI Slots
 Touch Screen: Resistive

Mechanical Specifications

Construction: Heavy-duty steel chassis, IP-65 certified steel front panel
 Front Panel Color: Black (other colors or stainless steel available on request)
 Mounting: Panel Mount
 Operating Temperature: 0~50°C
 Storage Temperature: -20°C~60°C
 Vibration: 5 - 17Hz, 0.1" double amplitude displacement;
 17 - 640Hz, 1.5G acceleration peak to peak
 10G acceleration peak to peak (11ms)
 Shock: 10G acceleration peak to peak (11ms)
 EMC: FCC/CE Class A certified
 Power Supply: 10.8~28VDC, optional 110-220VAC/60W power supply
 Dimensions: 484 mm (W) x 139.3 mm (D) x 400 mm (H)