

IES7112G-4GS

8-port 10/100/1000BaseT(x) Ethernet + 4-port Gigabit SFP slot**Managed Industrial Ethernet Switch**

Features

- Support IEEE802.3, IEEE802.3u, IEEE802.3z/ab, IEEE802.3x, IEEE802.1Q, IEEE802.1p, IEEE802.1W/D, IEEE802.1s, IEEE802.3ad, IEEE802.1X
- Support 8 10/100/1000Base-T(x) RJ45 Ethernet ports and 4 Gigabit SFP slot
- SW-Ring ring network patent technology (Fault recovery time<20ms)
- Support STP/RSTP/MSTP to enhance network stability
- Support IEEE802.1X, HTTPS, and SSH to enhance network security
- Support ACL function to enhance flexibility and security of network management
- Support static multicast, IGMP Snooping and GMRP
- Support Port based VLAN and IEEE 802.1Q VLAN
- Support QOS absolutely and opposite priority
- Support bandwidth management and storm suppression
- Support WEB, SNMP, LLDP and Telnet configuration
- Support port mirror and port trunking
- Support configuration file up and download
- Support redundancy DC power supply(12~48VDC)
- Support 1 channel relay alarm output
- Industrial grade 4 design, -40~75°C work temperature
- IP40 protection grade, DIN-Rail mounting



Introduction

IES7112G-4GS is an industrial grade, managed and redundancy Ethernet switch which supports 8 Gigabit Ethernet Ports and 4 Gigabit SFP slots. It provided some kinds of advanced network managed function, like as: SW-Ring redundancy ring network, STP/RSTP/MSTP, VLAN, Trunking, 802.1X, SNMP, LLDP, SSH, Quality of Service, Speed control, port mirroring, fault alarm and firmware upgrade online. SW-Ring can bring your Ethernet to intelligent redundancy. Standard Industry design, can satisfied every

requirement of the industry scene. All components used industry grade, it takes products high reliability. It provided wide voltage power supply input.

The switch accorded to CE, FCC standard and Industry grade 4 design requirement, support 2 channel DC power input and 1 channel relay alarm output, and -40~75°C working temperature, can meet all kinds of Industrial environment requirement and provide the solution of the economy.

Specification

Technology

Standard: Support IEEE802.3, IEEE802.3u, IEEE802.3z/ab, IEEE802.3x, IEEE802.1Q, IEEE802.1p, IEEE802.1W/D, IEEE802.1s, IEEE802.3ad, IEEE802.1X

Protocol: ARP, ICMP, TCP, DHCP, DNS, HTTP, Telnet, SW-Ring, RSTP, MSTP, LLDP, SSH, LACP, ACL, IGMP, GMRP, SNMP

Flow control: IEEE802.3x flow control, back press flow control

Function

Switch function: SW-Ring, QOS, 802.1QVLAN, RSTP, MSTP, LLDP, LACP, ACL, ROMN, GMRP, IGMP Snooping, SNMP, Port trunking, static multicast filter, port mirroring, bandwidth management, broadcast storm control, port flow statistics, upgrade online, up and download configuration file, user name access system

SW-Ring: Support Single, Couple, Chain, Dual homing

Exchange attribute

100M forward speed: 148810pps
 1000M forward speed: 1488100pps
 Transmit mode: store and forward
 System exchange bandwidth: 24G
 MAC address table: 8K
 Memory: 4M

Interface

Gigabit RJ45 port: 10Base-T/100Base-TX/1000Base-TX auto speed control, Half/full duplex and MDI/MDI-X auto detect
 Gigabit SFP port: 1000Base-X, SFP slot
 Console port: debug serial port carry out CLI command
 Alarm port: 2 bit terminal block
 1 channel relay alarm output

Transfer distance

Twisted cable: 100M (standard CAT5/CAT5e cable)
 Multi-mode: 1310nm, 2Km
 Single-mode: 1310nm, 20/40Km
 1550nm, 60/80/100/120Km

LED indicator

Run indicator: RUN
 Interface indicator: Link (G1~G12)
 Power supply indicator: P1, P2
 Alarm indicator: ALM

Power supply

Input Voltage: 12~48VDC
 Type of input: 4 bits terminal block

DC support reverse connection
 DC support redundant power supply

Consumption

No-load consumption: 4.35W@24VDC
 Full-load consumption: 9.56W@24VDC

Working environment

Working temperature: -40~75°C
 Storage temperature: -40~85°C
 Relative Humidity: 5%~95 % (no condensation)

Mechanical Structure

Shell: IP40 protect grade, metal shell
 Installation: DIN-Rail mounts
 Weight: 960g
 Size (W×H×D): 70mm×160mm×130mm

Industry Standard

EMI: FCC Part 15, CISPR (EN55022) class A
 EMS: EN61000-4-2 (ESD), Level 3
 EN61000-4-4 (EFT), Level 3
 EN61000-4-5 (Surge), Level 3
 Shock: IEC 60068-2-27
 Free fall: IEC 60068-2-32
 Vibration: IEC 60068-2-6


Certification

CE, FCC, RoHS, UL508 (Pending)

Warranty: 5 years

Dimension

Unit (mm)

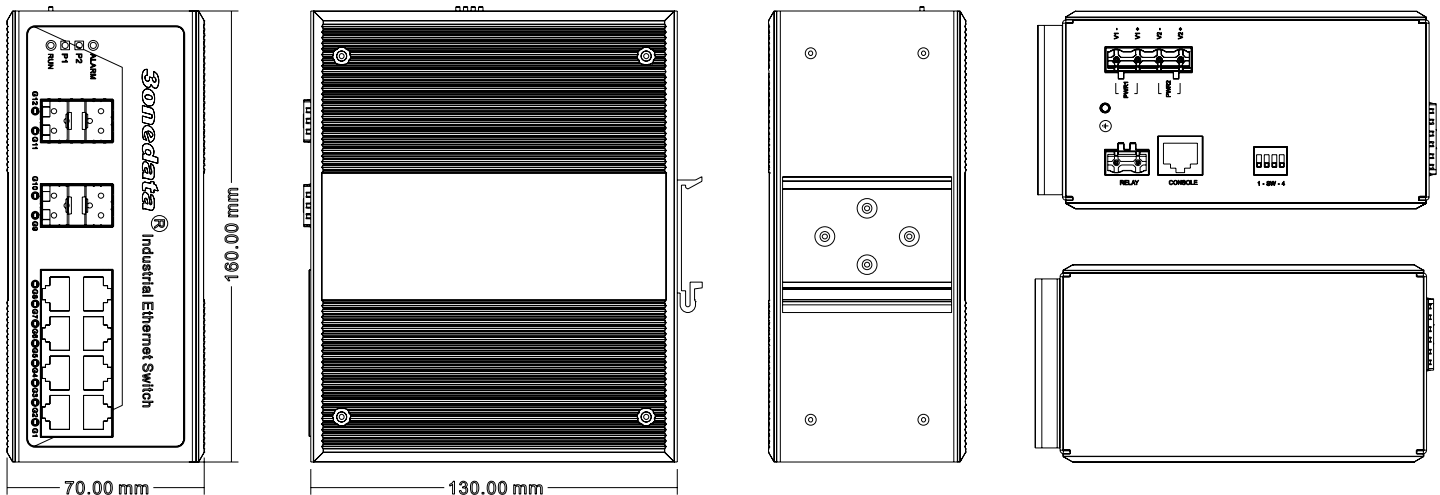



Packing List

1. Industrial Ethernet Switch ×1
2. User manual × 1
3. CD × 1
4. Certificate of quality × 1
5. Warranty card × 1