



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
02		2017/12/01	Nail	Modify Dim
03		2017/12/13	Jaans	Change Conn.1 To Shielding Conn.
04		2018/06/14	Nail	Modify Dim

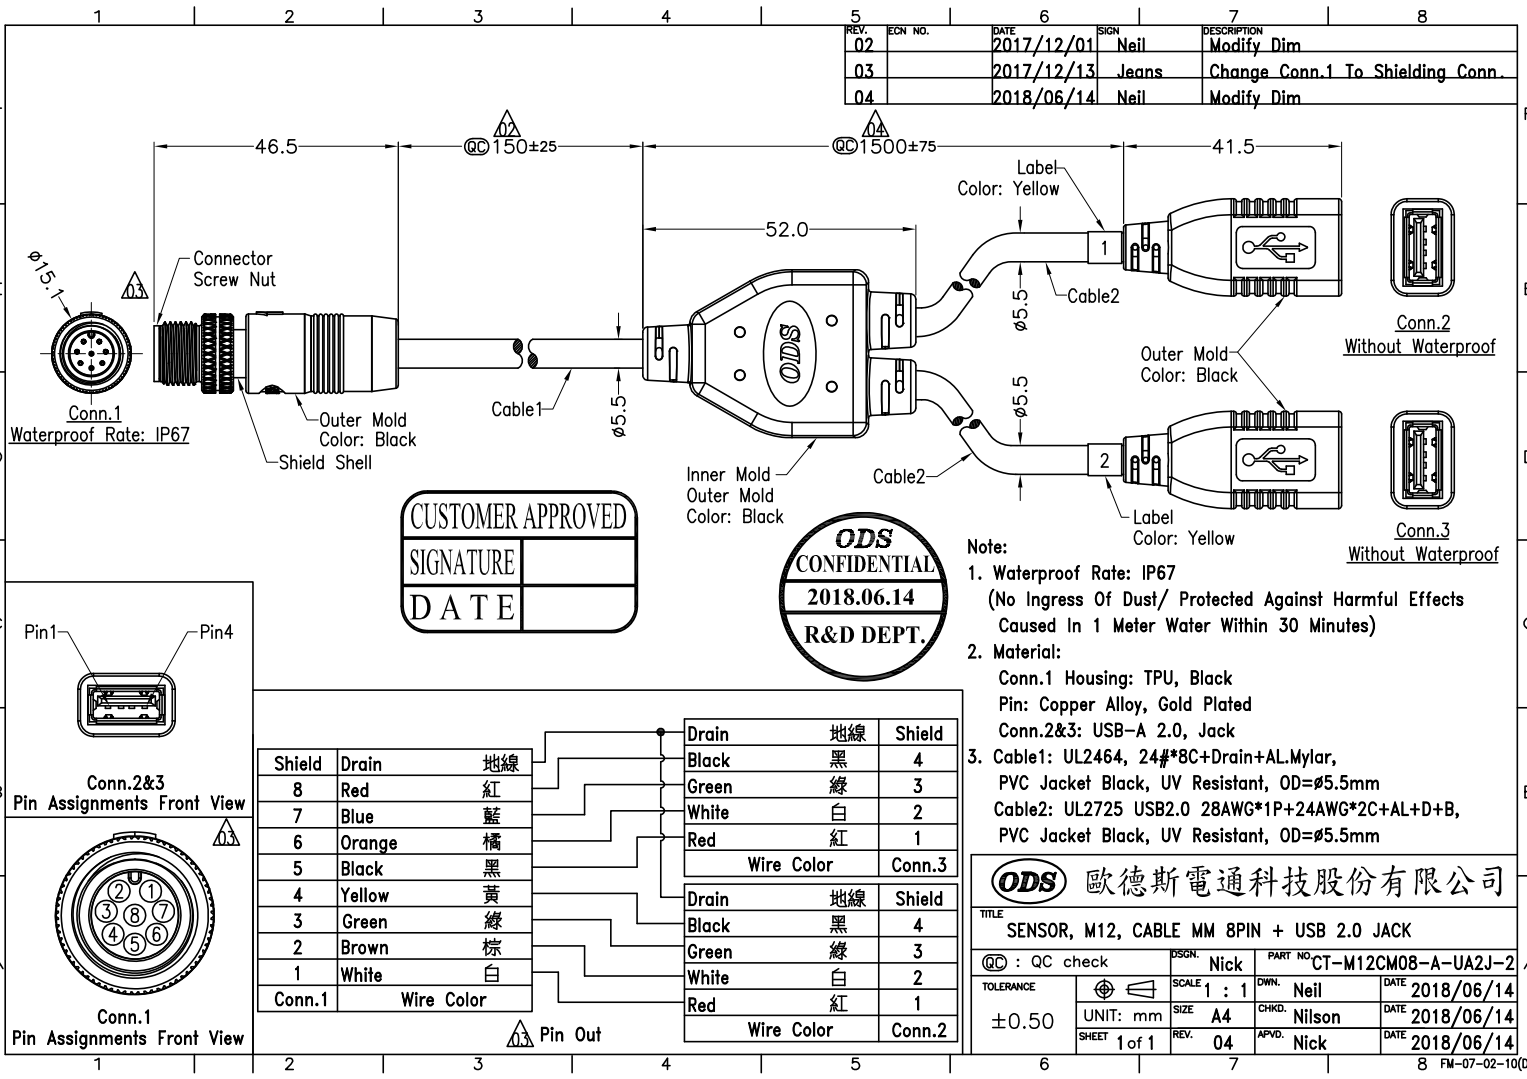

CUSTOMER APPROVED
SIGNATURE _____
DATE _____

ODS
CONFIDENTIAL
2018.06.14
R&D DEPT.

- Note:
- Waterproof Rate: IP67
(No Ingress Of Dust/ Protected Against Harmful Effects Caused In 1 Meter Water Within 30 Minutes)
 - Material:
Conn.1 Housing: TPU, Black
Pin: Copper Alloy, Gold Plated
Conn.2&3: USB-A 2.0, Jack
 - Cable1: UL2464, 24#*8C+Drain+AL.Mylar, PVC Jacket Black, UV Resistant, OD=Ø5.5mm
Cable2: UL2725 USB2.0 28AWG*1P+24AWG*2C+AL+D+B, PVC Jacket Black, UV Resistant, OD=Ø5.5mm

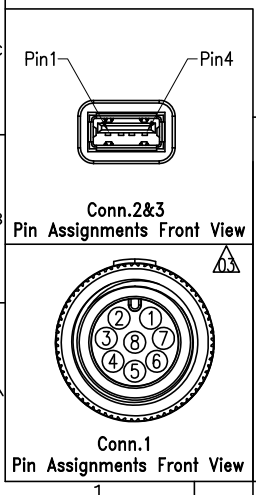

Shield	Drain	地線	Wire Color	Conn.3
8	Red	紅	Black	4
7	Blue	藍	Green	3
6	Orange	橘	White	2
5	Black	黑	Red	1
4	Yellow	黃	Wire Color	
3	Green	綠	Drain	地線
2	Brown	棕	Black	黑
1	White	白	Green	綠
Conn.1	Wire Color		White	白
			Red	紅
			Wire Color	Conn.2

ODS 歐德斯電通科技股份有限公司

TITLE: SENSOR, M12, CABLE MM 8PIN + USB 2.0 JACK

QC : QC check	DSGN: Nick	PART NO: CT-M12CM08-A-UA2J-2
TOLERANCE: ±0.50	SCALE: 1:1	DWN: Neil
UNIT: mm	SIZE: A4	CHKD: Nilson
SHEET: 1 of 1	REV: 04	APVD: Nick
		DATE: 2018/06/14